

ProStock™

Small Footprint, High Capacity Storage



With the high-security dispensing of the ProStock, you can manage the distribution of hundreds of items at the point of use all within a very small footprint. Carousel dispensing provides the flexibility to issue one or multiple items while eliminating the unproductive time of walking to and from a tool crib. The pie-shaped sections of the carousel allow for easy configuration of multiple-sized items such as safety supplies, cutting tools, gauges, and batteries. Driven by CribMaster software, the ProStock reduces stockouts, lowers costs, and controls inventory consumption.

- High security for controlled consumption
- Simple carousel reconfiguration for flexible storage
- Dispense single items or kitted items
- Optional lockers for large item storage
- Carousels are self-calibrating and field-configurable
- Available in full-size and ProStock Mini



ProStock Configurations

The full-size ProStock comes standard with 10 carousels, and the ProStock Mini comes with 5 carousels. Optional pop-open lockers may be substituted for carousels. The ProStock can be paired with any traditional vending solution and can function as a main or auxiliary unit.

Suggested Inventory Types

The ProStock is tailored to dispense MRO, PPE, durables, and cutting tools such as:


- Gloves
- Inserts, taps, and dies
- Batteries
- Safety glasses
- Aerosols
- Power tools
- Hand tools

Carousel Configurations

Usable Carousel Bin Dimensions

Section Divide	1	2	3	4	5	6	7	8	9	10
Front Width (in)	1.2	2.4	3.6	4.8	6	7.2	8.4	9.6	10.8	12
Front Width (cm)	3.05	6.1	9.14	12.19	15.24	18.29	21.34	24.38	27.43	30.48
Back Width (in)	0	0.19	0.38	0.56	0.75	0.94	1.13	1.32	1.51	1.7
Back Width (cm)	0	0.48	0.97	1.42	1.9	2.39	2.87	3.35	3.84	4.32

Each section divide depth is 9.6 in / 24.38 cm and height is 4.75 in / 12.07 cm.
Carousels are field-configurable. Maximum carousel capacity is 35 lbs / 15.88 kg.

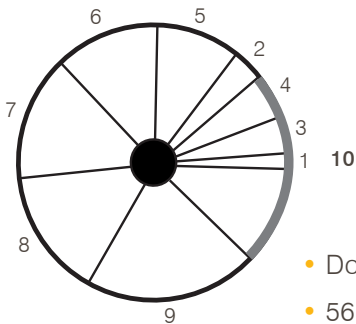

- Door opens up to 10 bins wide
- 56 usable carousel bins

Carousel Features and Benefits

- Self-calibrating drawer saves time with easy and accurate setup
- Motorized, push-button door eliminates manual closing
- Modular components allow for easy maintenance and improve uptime
- Lightweight design is robust, durable, and easy to use

Locker Configurations


Usable Locker Depth and Height

Depth	28 in	71.12 cm
Height	4 in	59.69 cm

Usable Locker Width

Doors	1	2	3	6
Width (in)	23.5	11	7.5	3.5
Width (cm)	59.69	27.94	19.05	8.89


One locker configuration replaces one carousel.
Maximum locker capacity is 100 lbs / 45.36 kg.




1 Door



2 Door



3 Door



6 Door

ProStock Specs

Main Exterior Dimensions

Height Full-size	83 in	210.82 cm
Height Mini	61.27 in	155.63 cm
Width	34.25 in	87 cm
Depth	37.38 in	94.93 cm

Auxiliary Exterior Dimensions

Height Full-size	83 in	210.82 cm
Height Mini	44.52 in	113.08 cm
Width	29.88 in	75.88 cm
Depth	31.5 in	80.01 cm

Weight

Main Full-size	685 lbs	311 kg
Auxiliary Full-size	635 lbs	288 kg
Main Mini	371 lbs	168 kg
Auxiliary Mini	346 lbs	157 kg

Power Requirements

Amps	3	1.5 (EU)
Voltage	120	230 (EU)

Operating Environment

Temperature	32°F to 95°F	0°C to 35°C
Humidity	20% to 85% (no condensation)	

Technical Info

CE Compliant

Windows OS



CRIBMMASTER
CribMaster Global Headquarters
1955 West Oak Circle
Marietta, GA 30062
Toll Free // 1.877.960.0602
www.cribmaster.com