

# ToolBox™

## Secure Storage, Flexible Dispensing



The CribMaster ToolBox provides sustainable point-of-use dispensing to help you manage and control cutting tools, MRO, PPE, consumable items, or any type of indirect material. Driven by CribMaster software, this high-security device allows your operation to run more smoothly, reduce waste, lower costs, and increase productivity.

- High security for controlled consumption
- Enhanced product visibility with clear front door
- Single item or kitted item dispensing
- Ample storage for cost-effective control
- Easily expanded with auxiliary units



## ToolBox Configurations

The ToolBox is available in 6-shelf and 7-shelf configurations. Offering a flexible dispensing layout, this solution can be configured to address your specific inventory needs. The ToolBox can be paired with any traditional vending solution and can be a main or auxiliary unit.

## Suggested Inventory Types

The ToolBox is tailored to dispense small PPE and cutting tools such as:

- Inserts
- Batteries
- Safety glasses
- Filters
- Tape
- Fasteners

# ToolBox Configurations

## Single Helix Configuration (2.5 in / 6.35 cm diameter)

Helix Count	5	7	8	9	10	12	15	18	24	32
Slot Depth (in)*	4.04	2.9	2.51	2.25	2.02	1.66	1.3	1.05	0.75	0.53
Slot Depth (cm)*	10.26	7.37	6.38	5.72	5.13	4.22	3.3	2.67	1.91	1.35

## Large Helix Configuration (3.75 in / 9.53 cm diameter)

Helix Count	4	5	7	9	10	12	15			
Slot Depth (in)*	4.1	3.45	2.58	2.05	2.01	1.55	1.24			
Slot Depth (cm)*	10.41	8.76	6.55	5.21	5.11	3.94	3.15			

## Dual Helix Configuration (5 in / 12.7 cm diameter)

Helix Count	5	7	10	12	15	18	24			
Slot Depth (in)*	4.04	2.9	2.02	1.66	1.3	1.05	0.75			
Slot Depth (cm)*	10.26	7.37	5.13	4.22	3.3	2.67	1.91			

Each single helix shelf can hold 10 SKUs in a 2.5 in / 6.35 cm opening. Each large and dual helix shelf can hold 5 SKUs in a 5 in / 12.7 cm opening. Shelf height is 6 to 8 in / 15.24 to 20.32 cm. Single coil maximum capacity is 10 lbs / 4.54 kg. Maximum shelf capacity is 100 lbs / 45.36 kg.

## ToolBox Specs

### Main Exterior Dimensions

Height	73 in	185.42 cm
Width	39 in	99.06 cm
Depth	40 in	101.6 cm

### Auxiliary Exterior Dimensions

Height	73 in	185.42 cm
Width	39 in	99.06 cm
Depth	36 in	91.44 cm

### Weight

Main - 6 Shelf	630 lbs	286 kg
Auxiliary - 6 Shelf	580 lbs	263 kg
Main - 7 Shelf	650 lbs	295 kg
Auxiliary - 7 Shelf	600 lbs	272 kg

### Power Requirements

Amps	3	1.6 (EU)
Voltage	115	230 (EU)

### Operating Environment

Temperature	35°F to 110°F	1°C to 43°C
Humidity	20% to 85% (no condensation)	

### Technical Info


CE Compliant	
Windows OS	

## Accessories

- Vertical partition or flip bar pusher to vend narrow items such as end mills, insert boxes, and pens
- Riser platform to vend short items such as battery packs
- Auger helix for vending small items such as single cutting tool inserts and welding tips (available in 30 coil pitch with 0.5 in / 1.27 cm slot depth)
- V-channel mini helix to vend small narrow items such as single batteries

### Mini Helix Configuration

Helix Count	10	20	32
Slot Depth (in)*	1.87	0.96	0.53
Slot Depth (cm)*	4.75	2.44	1.35

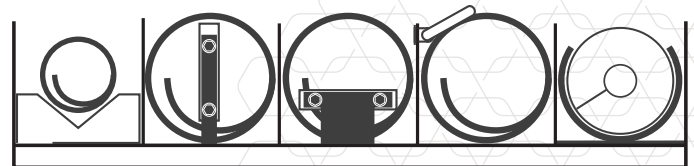

V-channel & Mini Helix    Vertical Partition    Riser Platform    Flip Bar Pusher    Auger



CribMaster Global Headquarters  
1955 West Oak Circle  
Marietta, GA 30062

Toll Free // 1.877.960.0602  
www.cribmaster.com

\* Not the actual size of opening. Slot depth is measured from the peak of one spiral pitch to the next.